




Pocono Pool Products

KIDNEY & FREEFORM LINER ORDER FORM

Company Name: _____ **Cust. Name/PO#:** _____
Address: _____ **Hung (Beaded) - Bead Type:** _____
City: _____ **State:** ____ **Zip:** _____ **Overlap - Size of Overlap:** _____
Phone: _____ **Cell:** _____ **Liner Over Steps: YES or NO** (Attach Step Orderform)
Fax: _____ **Contact:** _____ **Cut-Out Steps: YES or NO** (Show Location Below)
Liner Pattern: Tile/Wall: _____ (20 or 28 mil) **Floor:** _____ (20 or 28 mil)

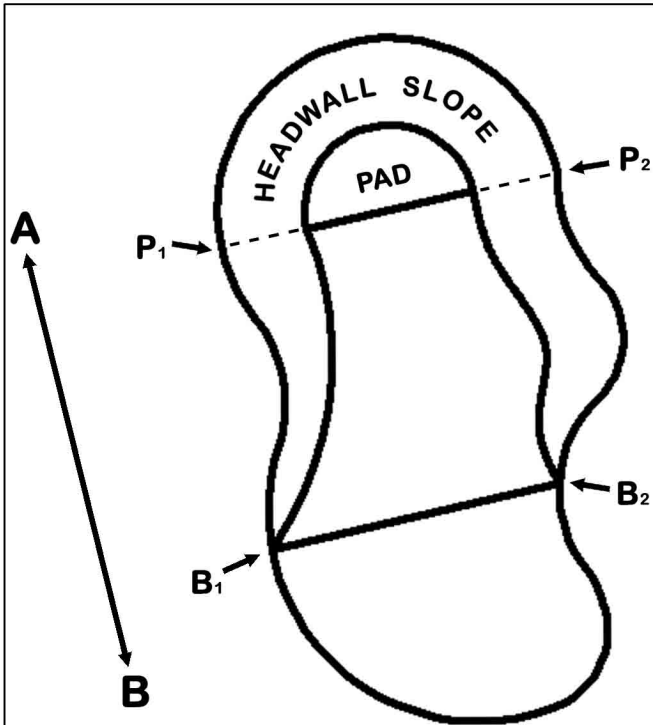

Distance from A to B should be at least 10', the further apart, the better. The line that A & B represent, cannot cross or come within 5' of the pool.

Number points around perimeter of pool, approximately every 3 feet. Use more points for tighter (smaller) radiuses and less for large radiuses. For straight panels, use 1 point at each end and 1 in the middle.

Place a point at all transitions (where radiuses change). Use panel joints (not coping joints) wherever possible.

Measure from both A & B to all points around pool. Include both sides of Break (B₁ & B₂) and points where the pad-line intersects with pool wall (P₁ & P₂). Also, include any other points that might be necessary (i.e. steps).

Sketch Showing Orientation and Shape of Pool.
Include Location of Points A & B

Distance from A to B: _____
Wall Height: _____
Depth (Measured at Edge of Pad): _____

Pt	A	B
B ₁		
B ₂		
P ₁		
P ₂		

Distance from B₁ to B₂: _____
Distance from P₁ to P₂: _____
Headwall Slope: _____